



TASSEL CAP INSTALLATION INSTRUCTIONS


TOOLS YOU WILL NEED BEFORE GETTING STARTED:

1. Piece of fabric (something that doesn't fray like Leather or Vinyl). Fabric needs to be 3 inches wide. Length should be your desired tassel length, plus 1/2 inch.
2. Scissors or Rotary Cutter
3. Permanent Glue
4. Phillips Head Screwdriver
5. Tassel Cap Hardware. Be careful not to lose the small screw (not pictured) included with your Hardware.
6. Ruler
7. Marker
8. Sewing Clip




STEP 1 MARK YOUR FABRIC:

1. Measure 1/2 inch down from the top of your fabric on the "wrong" side and mark across. This end will be placed in the hardware.
2. Measure 1/4 inch strips across fabric to make your fringe. This can also be cut free hand and eye-balled if you desire.

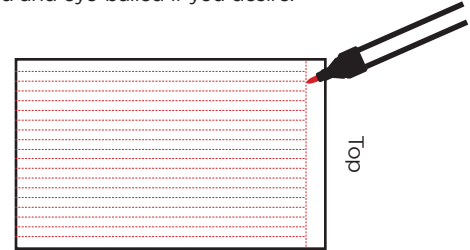


STEP 2 CUT THE FABRIC:

Cut the fabric into strips from the bottom of the fabric up to your 1/2 inch mark.

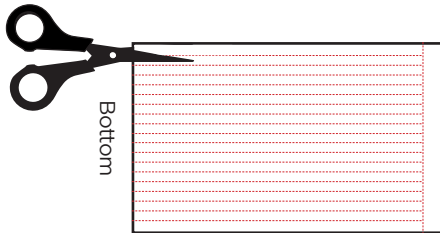


STEP 3 ROLL YOUR FABRIC:

Carefully roll your fabric up to make the tassel and temporarily secure with a sewing clip or other similar item.

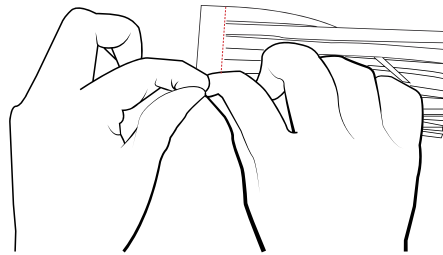

STEP 4 APPLY GLUE:

Glue the inside of the tassel hardware to hold the tassel in place.

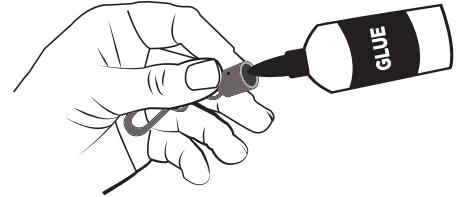

STEP 5 FINISH ASSEMBLY:

Insert the tassel into the hardware. Place screw in tassel hardware hole and use Phillips Head screwdriver to twist it into place through the fabric.

