


# Bobbin Winder Instructions

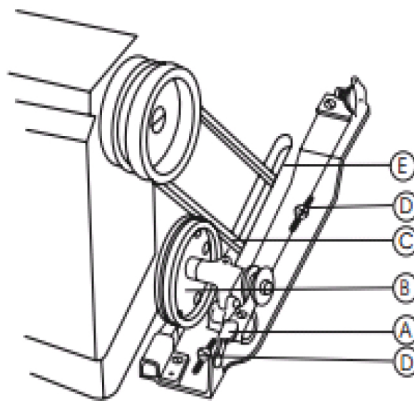

## INSTALLATION

1. Align pulley (B) of bobbin winder with outside of belt (C).

NOTE: Keep proper clearance between them so that when pulley (B) comes in contact with belt (C) after the stop latch thumb lever (A) is depressed, thereby the belt (C) drives the pulley (B) while machine running.

2. After, check bobbin winder is in parallel with belt slit (E) of table, fastened by two wood screws (D).

## HOW TO USE

Bobbin Winders are universal, meaning they will wind a wide variety of bobbins and can be used with most industrial straight stitch machines.

In general, most bobbins have the same size center hole, making it easy to simply insert the bobbin onto the spindle, thread the bobbin winder, and start.

(The bobbin should sit snug on the spindle. When the wheel is engaged, and the spindle begins to spin, the bobbin should spin, thus winding the thread around the bobbin.)

## HOW TO ADJUST THE WINDER IF THE BOBBIN IS TOO LOOSE

Notice the spindle is split down the center. This allows you to widen the spindle to accommodate bobbins with larger diameters. Simply place a flathead screwdriver between the two prongs, and gently spread them apart. This will increase the diameter of the spindle, allowing the larger bobbins to fit securely on the spindle.