

# How to Use The Snap Source® Products

## The SnapSetter™


**What's our secret to secure snap attachment? It's the SnapSetter™!**

### How does the SnapSetter™ work?

Simply position the snap components and fabric in between the layers of the SnapSetter™ and hammer into place.

#### Project idea:

Replace the buttons on shirts with snaps to add a little pizzazz. They're a fun alternative to buttons and a "snap" to attach.

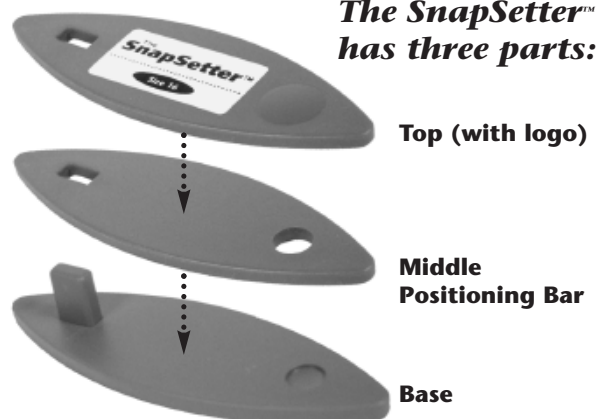

### Easy SnapSetter™ instructions:



**1** Disassemble the three tool pieces by pushing on the post while lifting the middle and top sections.



**2** With prongs facing up, place the snap in the indented area of the tool base.



**3** Place your fabric over the prong points.



**4** Slide the middle positioning bar over the post on the base.

**5** With right sides up, place the snap socket into the middle positioning bar (the raised side down toward the fabric).

**6** Slide the top over the post onto the middle positioning bar.



**7** Hammer the snap parts into place.



**8** Repeat steps 1-7 to attach the remaining snap components.

**The Snap Source® products are designed to make snapping up your creative projects fun and easy!**

### Hints and Tips

**To get into the tight areas surrounding multiple stitched layers on cuffs, diaper openings or jacket fronts:**


Using any SnapSetter™ tool base or adapter, begin setting the snap, but hammer only once to set the snap loosely on the fabric. Disassemble the SnapSetter™. Reposition the fabric back onto the SnapSetter™ base and place



the Middle Positioning Bar over the post outward away from the tool base. Then, add the tool top. The only two SnapSetter™ pieces touching the snap should be the tool top and base allowing the bulky layers of the fabric to not interfere with the snapping process. Hammer the tool twice more to set the snap tightly onto the fabric.

#### Removing snaps:

If you need to remove a snap, gently twist a screwdriver back and forth to loosen the prongs all around the socket or stud. Repeat these steps to remove the component from the opposite side of the garment.



The Snap source®

© 2004 The Snap Source, Inc.

P.O. Box 99733 • Troy, MI 48099-9733  
1-800-725-4600

[www.snapsource.com](http://www.snapsource.com)